


SOCKET OUTLETS



- Mounting on the rail DIN EN 50 022 width 35 mm
- ZS20 according to IEC 884-1, ZS21 according to DIN 49 440 ("SCHUCKO")
- Lead-in wire only from the bottom: type ZS203, ZS213
- Lead-in wire from both the bottom and top (running outlets): type ZS206, ZS216

Socket outlets



Type	Application	Lead-in wire	Product code	Weight [kg]	Packing [pcs]
ZS203	IEC	from the bottom	00001	0.15	1
ZS206	IEC	from both the bottom and top	00002	0.15	1
ZS213	DIN ("SCHUCKO")	from the bottom	00003	0.15	1
ZS216	DIN ("SCHUCKO")	from both the bottom and top	00004	0.15	1

Specification

Type	ZS20, ZS21
Standards	IEC 884-1, DIN 49 440
Approval marks	
Rated operating voltage/current	U_e/I_n 230 V a.c./16 A, 250 V d.c./10 A
Mounting on the rail DIN EN 50 022 - width	35 mm
Ambient temperature	-25 ÷ +55 °C
Degree of protection	IP20
Connection	1 ÷ 16 mm ² , 2x (1 ÷ 4) mm ²
Seismic immunity (8 ÷ 55 Hz)	3 g

Dimensions

ZS20

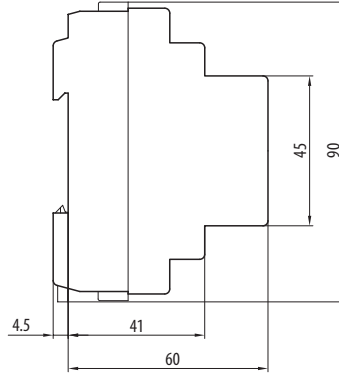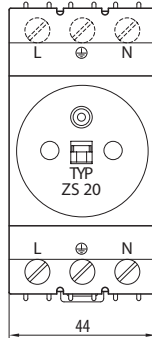

Diagram

ZS



ZS21

