


## SOCKET OUTLETS

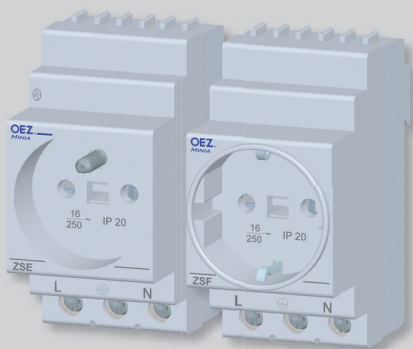

- Modular design with fastening on the „U“ rail wide 35 mm according to EN 60715.
- ZSE-.. according to IEC 60884-1 – a connector of type E; ensures contact by means of the connector with two round plug contacts and central earthing pin. This type is sometimes referred to as French one.
- ZSF-.. according to DIN 49440 - a connector of type F (Schuko), sometimes referred to as German one. It differs in the design of the earthing contact, which consists of two contact metal strips placed on the connector perimeter.

### Socket outlets



Type	Use	Connection	Product code	Number of modules	Weight [kg]	Package [pcs]
ZSE-03	IEC 60884-1	bottom	37290	2.5	0.15	1
ZSE-06	IEC 60884-1	bottom and top	37291	2.5	0.15	1
ZSF-03	DIN ("SCHUKO")	bottom	37292	2.5	0.15	1
ZSF-06	DIN ("SCHUKO")	bottom and top	37293	2.5	0.15	1

### Specifications



Type	ZSE-.., ZSF-..
Standards	IEC 60884-1, DIN 49440
Approval marks	
Rated operating voltage/current	$U_e / I_n$ 230 V a.c./16 A
Mounting on "U" rail according to EN 60715 - type	TH 35
Ambient temperature	-25 ÷ +55 °C
Degree of protection	IP20
Connection	1 ÷ 16 mm <sup>2</sup> , 2x (1 ÷ 4) mm <sup>2</sup>

### Dimensions

#### ZSE-..

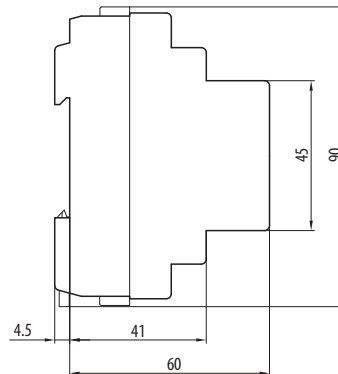

#### ZSF-..

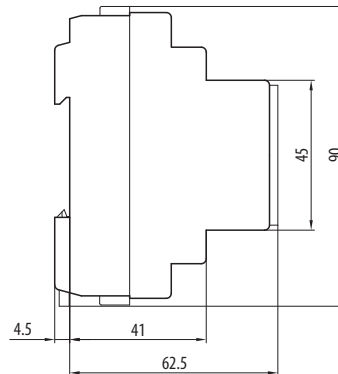

### Diagram

#### ZSE-.., ZSF-..

