

ELECTRIC BELLS



UMZ-A230

- For acoustic signalling of device status and the like
- Mechanical design.
- Without sparking.
- Minimum service life 300 hr.
- They are not intended for continuous operation (continuous duty max. 1 hour).
- There are intended for installation in switchboards.

Electric bells


Rated operating voltage U_e	Type	Order code	Number of modules	Weight [kg]	Package [pcs]
AC 8 ÷ 12 V	UMZ-A012	OEZ:35691	1	0.075	1
AC 230 V	UMZ-A230	OEZ:35692	1	0.075	1

Specifications

Type	UMZ-..		
Approval marks			
Power supply			
Rated operating voltage	U_e	AC 8 ÷ 12 V, AC 230 V	
Input power		4.6 VA	
Rated frequency	f_n	40 ÷ 60 Hz	
Connection			
Conductor Cu		0.2 ÷ 2.5 mm ²	
Torque		0.5 Nm	
Conductor L and N		arbitrarily to terminals	
Other data			
Loudness from a distance 0.5 m		90 dB	
Mounting on "U" rail according to EN 60715 – type		TH 35	
Degree of protection		IP20	
Ambient temperature		-20 ÷ +55 °C	
Working position		arbitrary	

Dimensions

UMZ-..

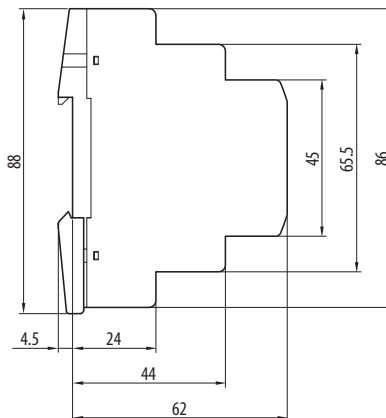

Diagram

UMZ

