

## PRESSING-IN NUTS



ZM10


### Basic description

- Pressed-in nuts ZM enable making a thread in busbars. They are intended for making mechanical joint only. Pressing-in can be carried out also by a hand press.
- The package contains: – 1 nuts.

### Pressing-in nut

Type	Order code	Thread	Weight [kg]	Torque max. Nm	Package [pcs]	Pressing height [mm]
<b>ZM8</b>	OEZ:11870	M8	0.004	10	1/200	1.9
<b>ZM8-V</b>	OEZ:35373	M8	0.005	10	1/200	3.9
<b>ZM10</b>	OEZ:11233	M10	0.006	32	1/200	1.9
<b>ZM10-V</b>	OEZ:35374	M10	0.080	32	1/200	3.9
<b>ZM12-V</b>	OEZ:11234	M12	0.010	32	1/200	3.9

### Dimensions

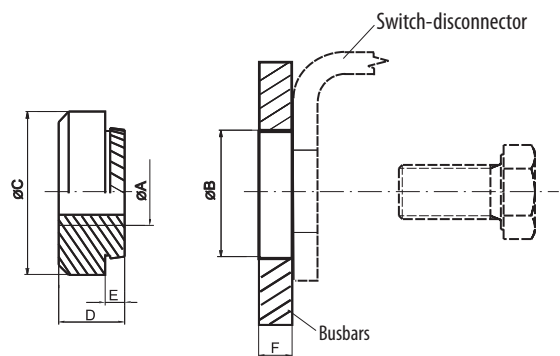

Type	Ø A	Ø B [mm]	Ø C [mm]	D [mm]	E [mm]	F min [N]
<b>ZM8</b>	M8	10.0 <sup>±0.1</sup>	14	6.5	1.9	2
<b>ZM8-V</b>	M8	10.0 <sup>±0.1</sup>	14	10.0	3.9	4
<b>ZM10</b>	M10	12.5 <sup>±0.1</sup>	16	6.5	1.9	4
<b>ZM10-V</b>	M10	12.5 <sup>±0.1</sup>	16	10.0	3.9	4
<b>ZM12-V</b>	M12	15.0 <sup>±0.1</sup>	18	10.0	3.9	4