


# Modular devices





## SOCKET OUTLETS

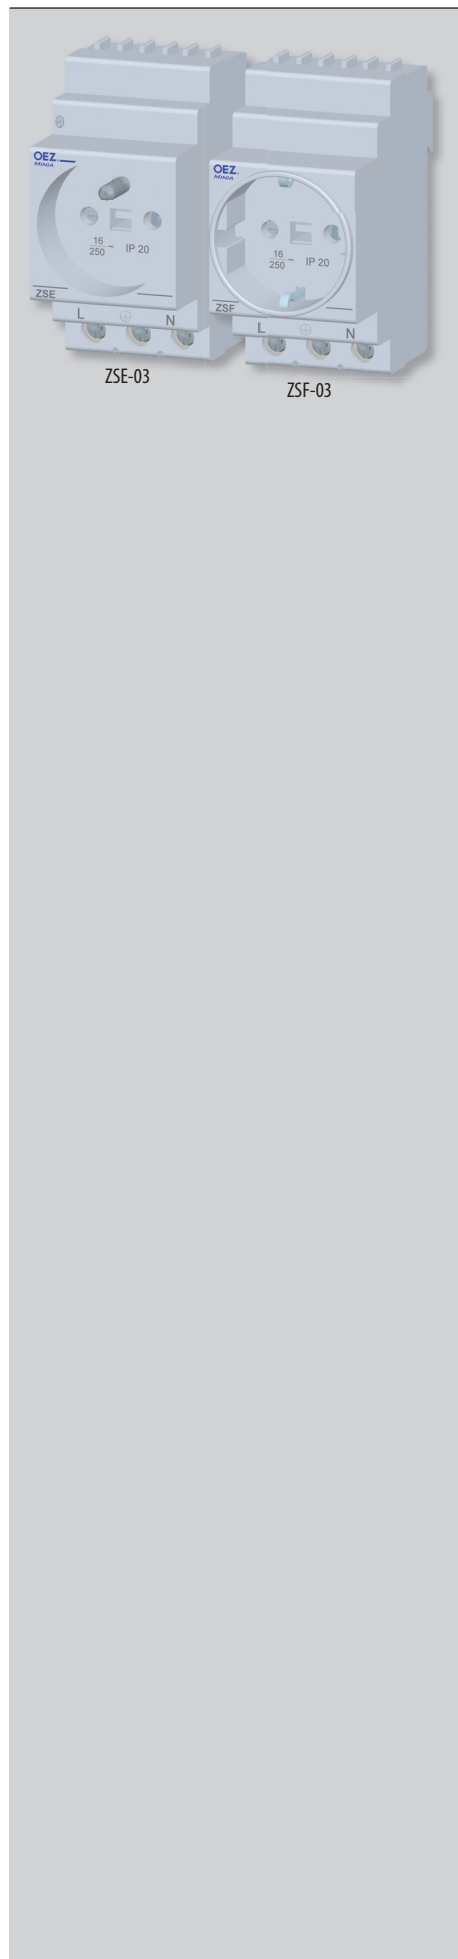

- Modular design with fastening on the "U" rail wide 35 mm according to EN 60715.
- ZSE... according to IEC 60884-1 – a connector of type E; ensures contact by means of the connector with two round plug contacts and central earthing pin. This type is sometimes referred to as French one.
- ZSF... according to DIN 49440 - a connector of type F (Schuko), sometimes referred to as German one. It differs in the design of the earthing contact, which consists of two contact metal strips placed on the connector perimeter.

### SOCKET OUTLETS



Type	Connection	Order code	Number of modules	Weight [kg]	Package [pcs]
ZSE-03	bottom	OEZ:37290	2.5	0.15	1
ZSE-06	bottom/top	OEZ:37291	2.5	0.15	1
ZSF-03	bottom	OEZ:37292	2.5	0.15	1
ZSF-06	bottom/top	OEZ:37293	2.5	0.15	1

### Specifications



Type	ZSE-..., ZSF-..
Standards	IEC 60884-1, DIN 49440
Approval marks	
Rated operating voltage/current	$U_n/I_n$ AC 230 V/16 A
Mounting on "U" rail according to EN 60715 - type	TH 35
Ambient temperature	-25 ÷ +55 °C
Degree of protection	IP20
Connection - conductor Cu	1 ÷ 16 mm <sup>2</sup> , 2x (1 ÷ 4) mm <sup>2</sup>

### Dimensions

#### ZSE-..

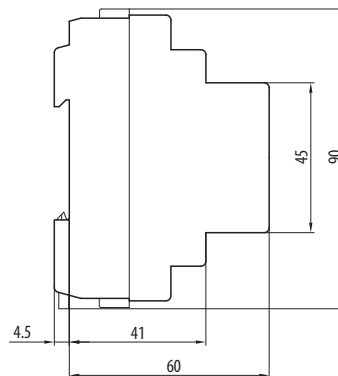

#### ZSF-..

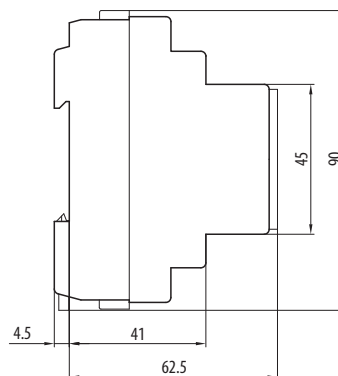

### Diagram

#### ZSE-..., ZSF-..



▶ **OEZ s.r.o.**  
Šedivská 339  
561 51 Letohrad  
Czech Republic  
tel.: +420 465 672 111  
+420 465 672 101  
fax: +420 465 672 398  
+420 465 672 151  
e-mail: [oeztrade.cz@oez.com](mailto:oeztrade.cz@oez.com)  
[www.oez.com](http://www.oez.com)



Any changes reserved

